

Centrifugal Fan


Series
LPb




 EuroVent

Symbols and measurement units used in the catalogue.


V m ³ /min	= Delivery in m ³ /min
V m ³ /h	= Delivery in m ³ /h
pt mmH ₂ O	= Total pressure in mm H ₂ O
pt Pa	= Total pressure in Pascal
pd mmH ₂ O	= Dynamic pressure in mm H ₂ O
pd Pa	= Dynamic pressure in Pascal
c ₂	= Speed in m/s on pressing throat
n	= Fan rounds
L _p	= Noise level indicated in dB/A
P	= Power absorbed in kW
η	= Fan output

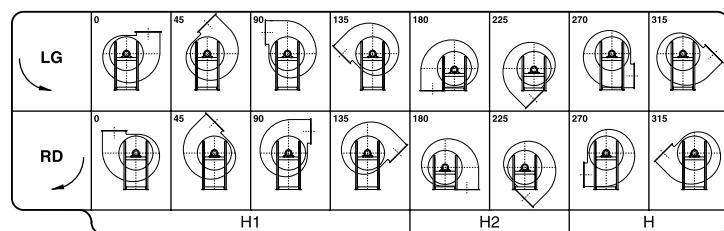Table of positions of discharge

Fans constructive executions in conformity with rules UNI EN ISO 13349 (2009).
EXECUTION 1



For belt drive. Whee keyed overhung. Supports mounted on a base outside the air stream.
Max air temperature 90 °C without cooling fan; 350 °C when fitted with cooling fan.

ESEC. 1

EXECUTION 9

For belt drive. Same as arrangement 1 with motor supported by the side wall of base.
Max air temperature: 90 °C without cooling fan; 350 °C when fitted with cooling fan.
Position of motor W or Z.

ESEC. 9

EXECUTION 12

For belt drive. Same as arrangement 1 with both fan and motor supported by the foundation frame.
Max.air temperature: 90 °C without cooling fan; 350 °Cwhen fitted with cooling fan.
Position of motor W or Z (exceptionally X or Y).

ESEC. 12

Plan for motor positioning belt drive.


General concepts about centrifugal fans

The centrifugal fan essentially is a scroll in which a wheel rotates. The wheel's movement is caused by an external energy source, that is usually an electric motor. The main characteristics of a centrifugal fan are:

- a) delivery
- b) pressure
- c) efficiency
- d) rotation speed

DELIVERY

It is indicated by the value of the fluid intaken through the fan in the time unit; normally this is stated by the ratio m³/sec., m³/min., or m³/h.

PRESSURE

It is usually indicated by the ratio kgf/m² or Pa. The pressure generated through a fan is named TOTAL (pt); it is the sum of two different pressures: STATIC + DYNAMIC. The static pressure (p.s.) is the potential energy that wins the circuit resistance when the fluid is passing through the circuit. The dynamic pressure (pd) is the kinetic energy of the moving fluid and it depends on the medium exit speed of the air from the fan throat; the formula is:

$$pd = \frac{C^2}{2g} \bullet 1.226 \quad C = \frac{V}{A}$$

where:

- V = delivery m³/sec.
- A = throat surface m²
- c = medium speed of the air m/sec.
- g = acceleration of gravity (9,81 m/sec)
- 1,226 = air specific gravity kg/m³ at 15°C and 760 mm Hg.

ENERGY

It consists in the ratio between the energy supplied by the fan to the fluid and the energy used by the external source to put in operation the fan.

The formula is:

$$\eta = \frac{V \bullet pt}{6120 \bullet P}$$

where:

- V = delivery m³/min.
- pt = total pressure kgf/m²
- P = used energy by the fan indicated in kW
- η = fan efficiency

ROTATION SPEED

It is indicated by the number of roundes per minute: at this speed the wheel must rotate in order to get the required performances. N.B. The following tables show the characteristics of an operating device at air 15°C, barometric pressure 760 mm Hg, specific gravity 1,226 kg/m³, test according to UNI EN ISO 5801:2009 (UNI 10531:1995) rules. If customer wishes get different performances with intermediary value in respect of the value shown in the tables or if he prefers a device operating with air suction at different temperature in respect of 15°C and with different specific gravity in respect of 1,226 we suggest to follow these rules the characteristics of fans change according to the variation in speed rotation and considering the specific gravity of the fluid intaken.

- a) Variation of rotation speed (n) with air specific gravity constant.
 1. The delivery (V) varies directly with rotations ratio:

$$V_1 = V \bullet \frac{n^1}{n}$$

2. The pressure varies with square number of rotations ratio:

$$pt_1 = pt \bullet \left(\frac{n^1}{n} \right)^2$$

3. The energy (P) varies with cube of rotations ratio:

$$p_1 = P \bullet \left(\frac{n^1}{n} \right)^3$$

- b) Variations of specific gravity (γ) of the air when rotation speed is constant.

1. The delivery (V) remains constant.
 2. The pressure (pt) and the energy (P) vary directly with the ratio of specific gravities.

$$pt_1 = pt \bullet \frac{\gamma^1}{\gamma} \quad P_1 = P \bullet \frac{\gamma^1}{\gamma}$$

The specific gravity of the air at different temperatures is obtained through the formula:

$$\gamma = \frac{1,293 \bullet 273}{(273+t)} \text{ (kg/m}^3\text{)}$$

The air density depending on a change of the atmospheric pressure is given by the following formula:

$$\gamma = \frac{Pb \bullet 13.59}{29.27 \bullet (273 + t)} \text{ (kg/m}^3\text{)}$$

where:

- γ = specific gravity at °C
- 1,293 = specific gravity of the air at 0°C
- t = air temperature indicated in °C
- 273 = absolute zero
- Pb = atmospheric pressure mm Hg

This table shows directly the air specific gravity at different temperatures:

t°C	-20	-10	0	+10	+15	+20	+30	+40	+50	+60	+70	+80	+90	+100	+120	+140	+160	+180	+200	+220	+240	+260	+280	+300	+325	+350
γ	1,396	1,342	1,293	1,248	1,226	1,205	1,165	1,128	1,093	1,060	1,029	1,000	0,973	0,947	0,90	0,85	0,82	0,78	0,75	0,72	0,69	0,66	0,64	0,62	0,59	0,56

Atmospheric pressure depending on altitude above sea-level:

mt	0	500	1000	1500	2000	2500	3000	3500	4000	4500
Pb mm Hg	760	720	680	640	600	560	530	500	470	440

CHARACTERISTICS

The features listed in the diagrams are referred to air at the temperature of + 15°C and at the barometrical pressure of 760 mm. Hg with specific gravity 1,226 Kg/m³.

NOISE LEVEL

The noise level values indicated are expressed in decibel scale A (dB/A) they are understood measured in a free range at the distance of **1.5 m** from the fan operating with the highest output capacity, connected to inlet and outlet pipe connections (rules UNI EN ISO 3740-3744-3746-13347).

ORIENTATIONS

All the fans can be constructed with the delivery mouth in 16 different positions (8 in clockwise rotation RD and 8 in counterclockwise rotation LG) as indicated on the orientation tables. Please note that the direction of rotation is determined by looking at the fan from the transmission side. Some sizes of these fans are revolvable always considering the rotation direction. This information is indicated at the end of the various tables of the overall dimensions. Flange see DIN 24154-24158.

ACCESSORIES (delivery on request)

- **intaking and pressing counterflange;**
- **inspection door:** to inspect and to clean the wheel and the scroll inside;
- **discharge cap:** it eliminates the condensate if any inside the fan and it is situated on the lowest part of the scroll.
- **vibrating proof joints in intaking and pressing time:** they are used to avoid the spreading of vibrations to the pipes;
- **safety grate for intaking throat:** it is used to avoid accidents when the fan is intaking from the room;
- **regulation lock on delivery:** it is used to regulate the fan delivery;
- **regulator of the flow rate in intaking time:** it is used to regulate the fan flow rate and it maintains high the efficiency level, also in regulating time.

SPECIAL CONSTRUCTIONS

Spark proof construction: when explosive fluids are carried or when the plant is installed in dangerous environments, the parts that come into contact with the intaken fluid are constructed by material without iron content to avoid rubbing, motor on request is supplied in special construction.

Corosionproofing construction: when corrosive fluids are carried, the parts that come into contact with the fluid are painted with special paints or they are constructed with special materials as austentic stainless steels (AISI 304-316 etc.).Constructions can be effected according to the customer's particular needs.

SOME VALUES OF AIR SPEED THAT MUST BE OBSERVED INSIDE THE IRON PIPES FOR SUCTION PLANTS, RELATING TO FOLLOWING MATERIALS:

Cereals dust	16–19 m/s
Varnish dust	15–18 m/s
Wooden shaving and sawdust	18–24 m/s
Dry dust of chemicals	17–20 m/s
Coal dust	20–25 m/s
Dust of plastic material working	18–23 m/s
Foundry fumes	15–18 m/s
Lapping sharpening and bufing wheels	20–25 m/s
Fumes of solvents for degreasing	12–17 m/s
Metallic shaving and dust	25–38 m/s
Rubber dust	17–20 m/s
Any toxic dust	15–25 m/s
Zinc oxide dust	18–21 m/s
Saw dust of marble	20–25 m/s
Hides buffing	18–23 m/s

SOME DATA ABOUT THE NUMBER OF THE AIR CHANGINGS FORESEEN IN CIVIL, INDUSTRIAL AND AGRICULTURAL ENVIRONMENTS:

Enviroments No. changings/hour					
Hen - hutch	8	Hide drying processes	35	Shops	5
Bovine - swine breeding	10	Factories for rubber production	12	Hospitals	6
Hotel halls - rooms - corridors	4	Factories for alimentary pastes	6	Gymnasiums	20
Garages	8	Factories for chemicals production	15	Baker shops	15
Banks	6	Joineries	6	Swimming-pools	25
Bathrooms - showerbaths	6	Spinning - and weaving mills	5	Dance-halls	20
Galvanic baths	25	Foundries	25	Card-rooms	10
Carpenter shops - welding shops	12	Forge shops	25	Waiting-rooms	10
Heating plants	60	Steam laundries	30	Schools	6
Churches	15	Rooms for electric furnaces	30	Metallurgical works	5
Coffee - houses - bars - restaurants	10	Rooms for furnace	20	Supermarkets	5
Cinemas - theatres	15	Warehouses for perishable goods	15	Dyeing plants	30
Dye works	15	Warehouses for unperishable goods	5	Printing shops	20
Tanneries	18	Tobacco manufactures	12	Toilettes	30
		Grinding mills	20	Technical departments	15

series LPb SPECIFICATIONS

USE:

The high output centrifugal fans of this series are suitable for the suction of clean or plants slightly dusty air in civil and industrial air conditioning. In particular plants for:

Ventilation: stables, mines, tunnels.

Suction: vitated air, welding fumes, vapours from solvent tanks and spraying booths.

Aeration: storage bins, sheds.


Cooling: plastic materials, cloths, glass plates.

Drying: fodder, cereals, papers, varnishes, wood.


Elimination: fumes and toxic gas.

This series is also used where it is necessary to transport air with maximum temperature of 90°C with low pressure. For temperatures of the transported fluid higher than 90°C up to 350°C a small heat stopping fan is splined to the shaft between support and scroll, besides the fan is painted with a special aluminium paint suitable for high temperatures.


Operating range

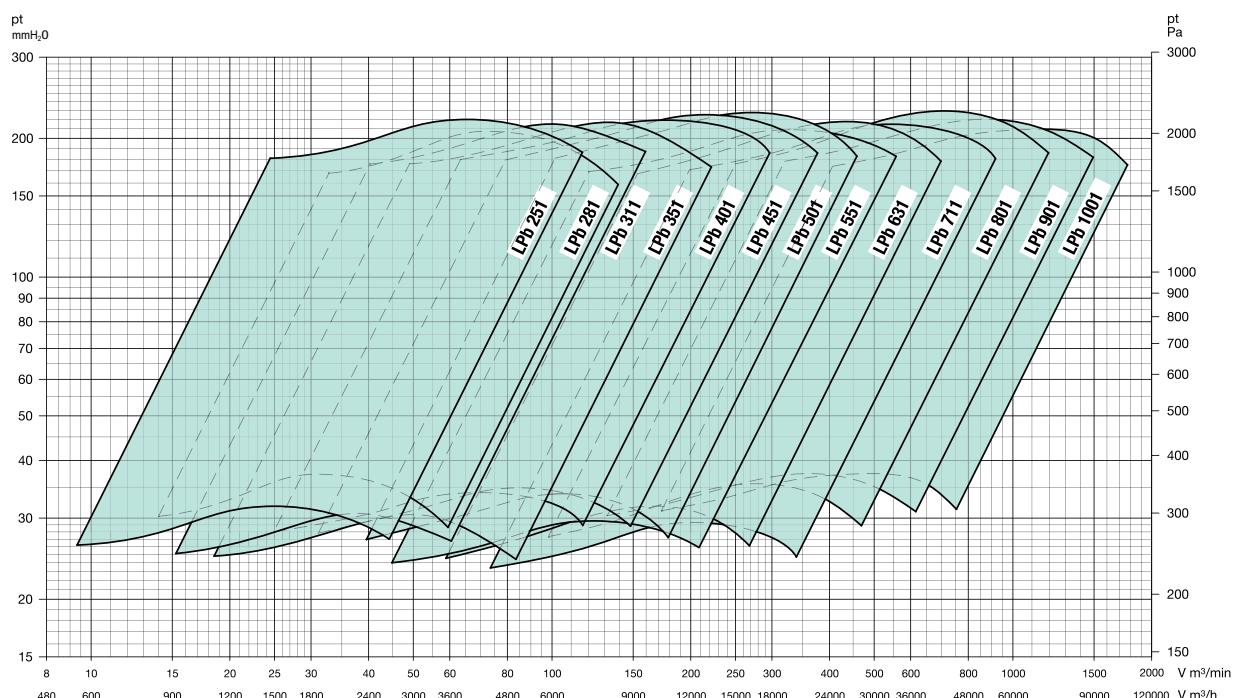



SERIES LPb 251 SPECIFICATIONS

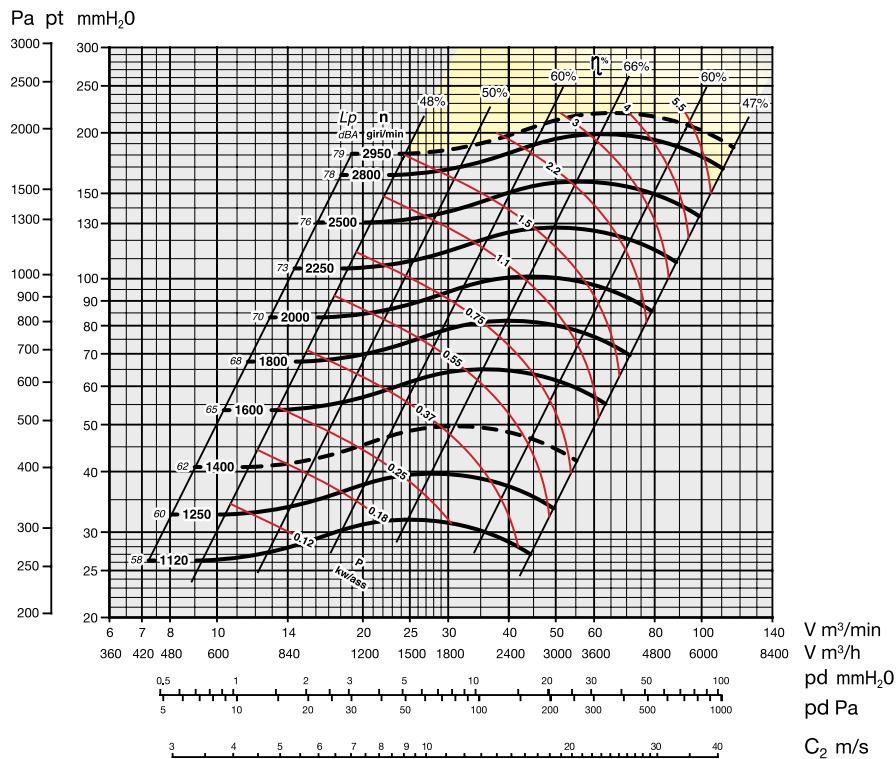
OVERALL DIMENSIONS in mm

Fan with cooling fan

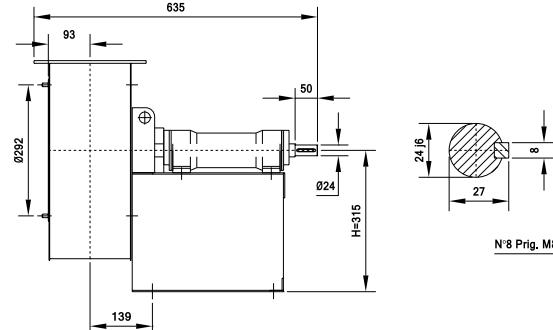
 PD² = 0,18 kgm²
 GD²

Weight kg 28

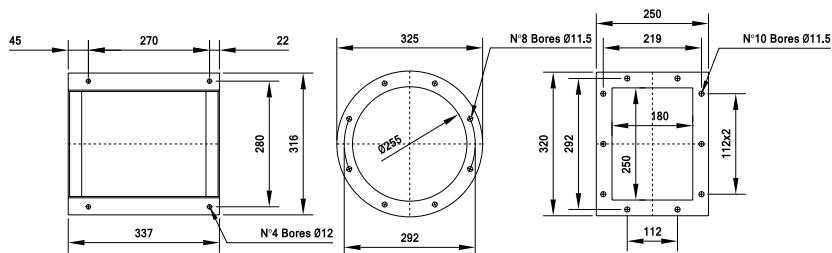


The fan is revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis's height	RD/ Clockwise rotation							Axis's height	LG/ Counter clockwise rotation							
	0	45	90	135	180	225	270	315	0	45	90	135	180	225	270	315
	H=315				H=200			H=315				H=315		H=200		H=315

SERIES LPb 281

SPECIFICATIONS

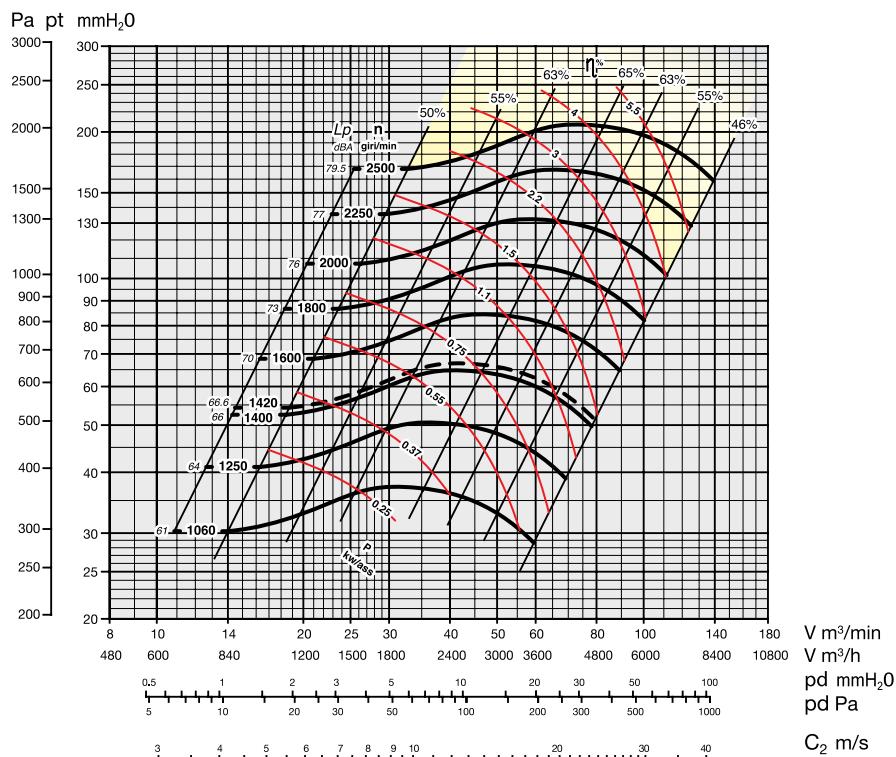

YELLOW ZONE - Consult technical office


Maximum admissible rounds:

<90°C = 2500 rounds/min.
90÷200°C = 2200 rounds/min.
200÷350°C = 1950 rounds/min.

Noise level tolerance + 3 dBA

KW consumed fan tolerance ± 3%

SERIES LPb 311 SPECIFICATIONS

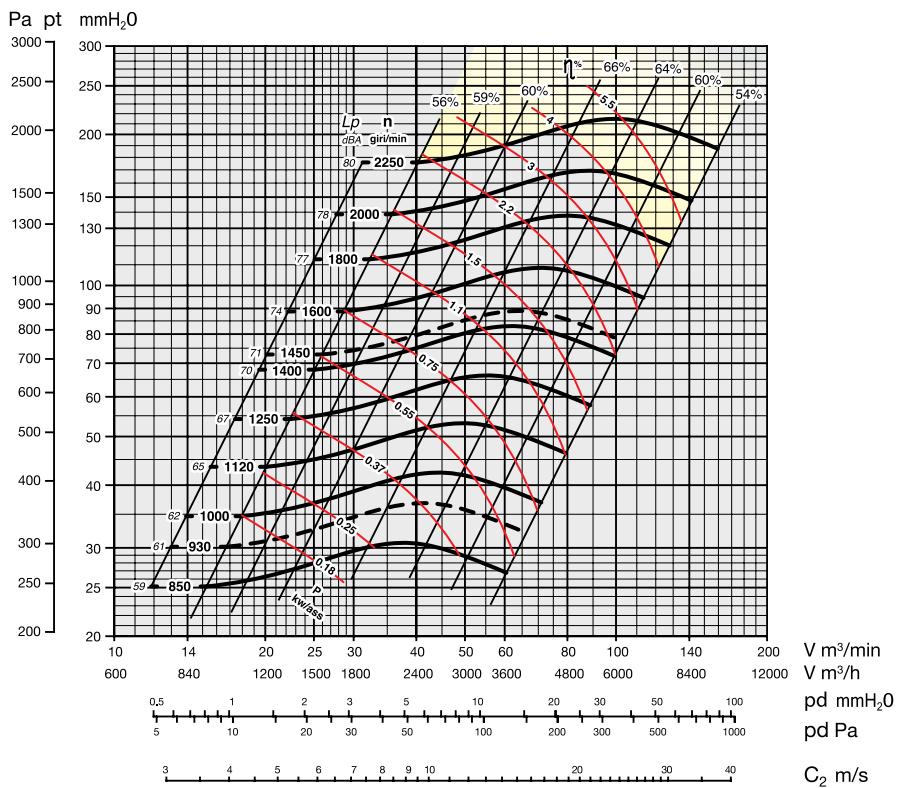

YELLOW ZONE - Consult technical office

Maximum admissible rounds:

<90°C = 2250 rounds/min.
90÷200°C = 1900 rounds/min.
200÷350°C = 1600 rounds/min.

Noise level tolerance + 3 dBA



KW consumed fan tolerance ± 3%

OVERALL DIMENSIONS in mm

Fan with cooling fan

 PD² = 0,45 kgm²
GD²

Weight kg 39

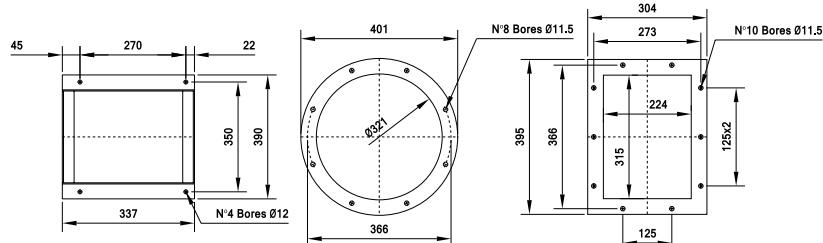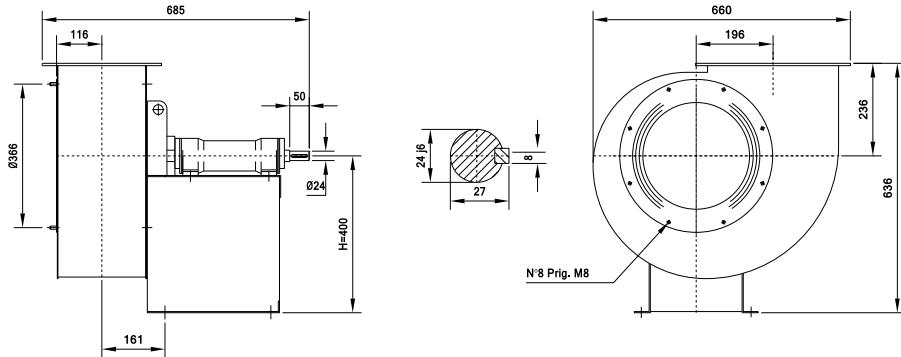


The fan is revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis's height	RD/ Clockwise rotation								Axis's height	LG/ Counter clockwise rotation							
	0	45	90	135	180	225	270	315		0	45	90	135	180	225	270	315
	H=400									H=400							

LPb 351

SERIES **LPb 351** **SPECIFICATIONS**

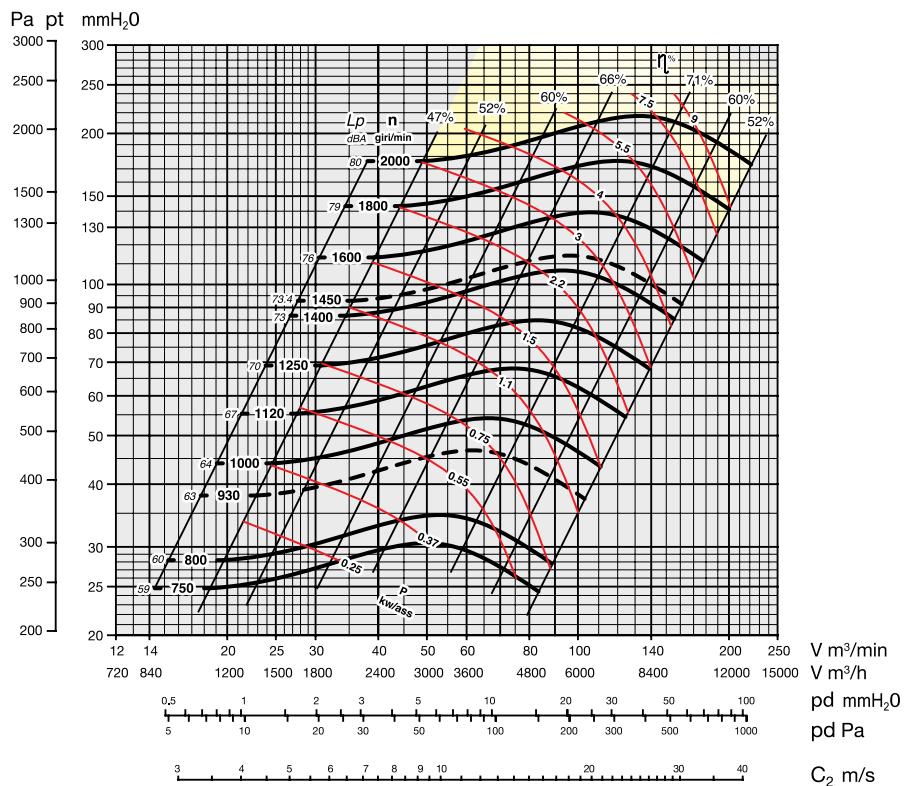

YELLOW ZONE - Consult technical office

Maximum admissible rounds:

<90°C = 2000 rounds/min.
90°÷200°C = 1800 rounds/min.
200°÷350°C = 1500 rounds/min.

Noise level tolerance + 3 dBA


KW consumed fan tolerance ± 3%

OVERALL DIMENSIONS in mm

Fan with cooling fan

PD² = 0,80 kgm²
GD²

Weight kg 65

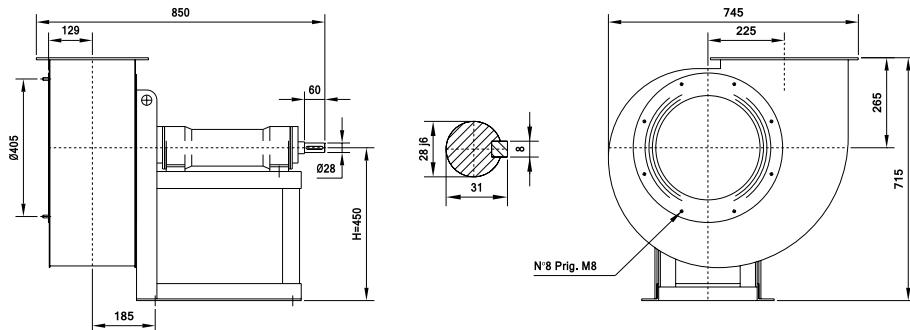


The fan is revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis height	RD/ Clockwise rotation							LG/ Counter clockwise rotation								
	0	45	90	135	180	225	270	315	0	45	90	135	180	225	270	315
									H=450							

SERIES LPb 401 SPECIFICATIONS

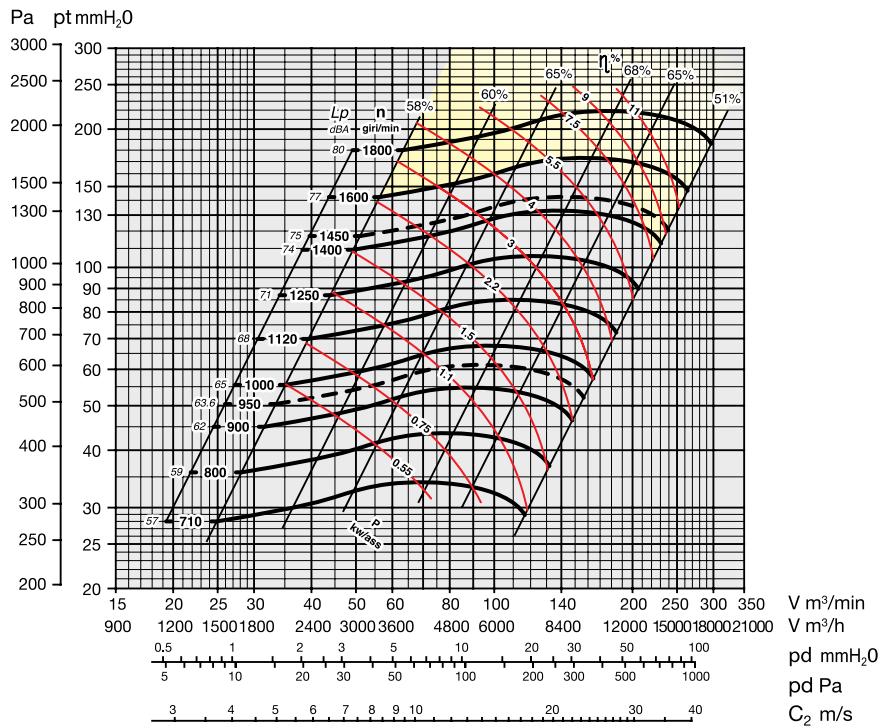

YELLOW ZONE - Consult technical office

Maximum admissible rounds:

<90°C = 1800 rounds/min.
90÷200°C = 1650 rounds/min.
200÷350°C = 1300 rounds/min.

Noise level tolerance + 3 dBA




KW consumed fan tolerance ± 3%

OVERALL DIMENSIONS in mm

Fan with cooling fan

 PD² = 0,93 kgm²
GD²

Weight kg 82

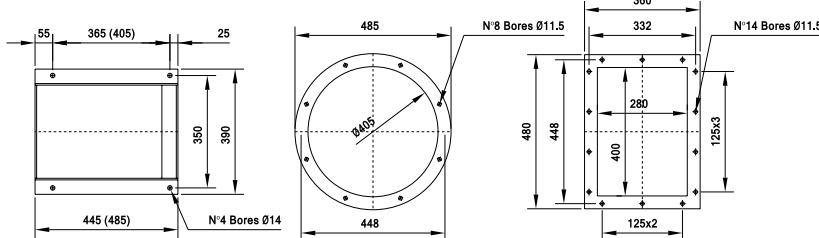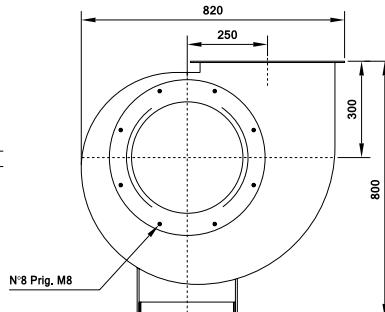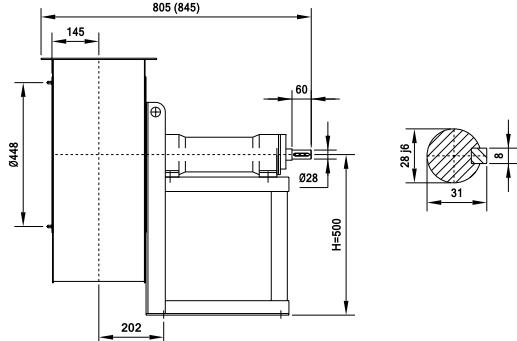

The fan is revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis's height	RD/ Clockwise rotation								Axis's height	LG/ Counter clockwise rotation							
	0	45	90	135	180	225	270	315		0	45	90	135	180	225	270	315
									H=500								
									H=300								
									H=500								

LPb 451

SERIES **SPECIFICATIONS**

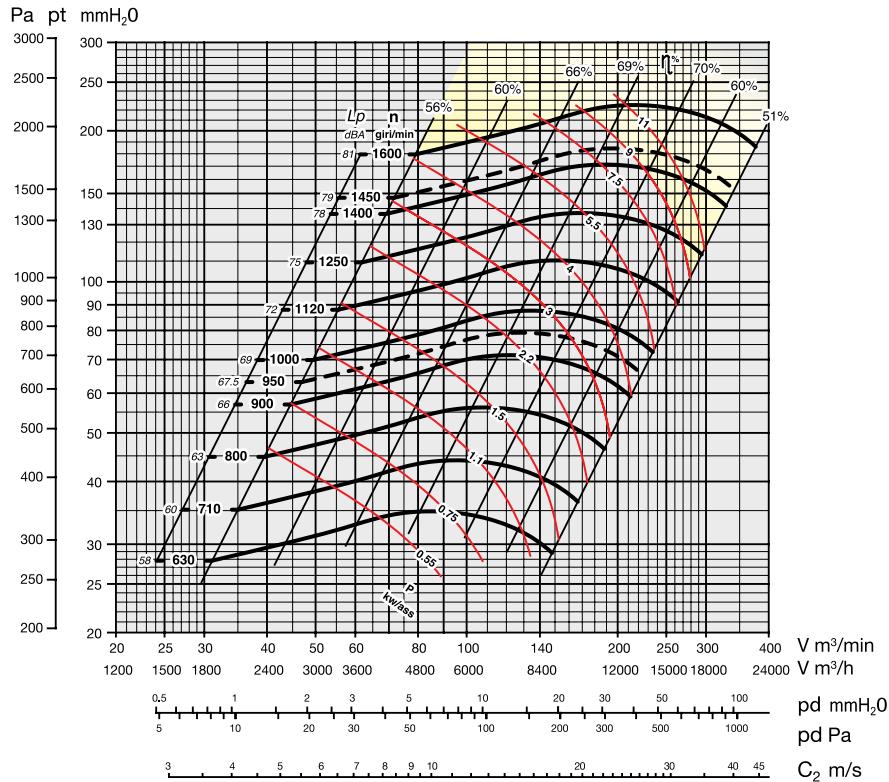

YELLOW ZONE - Consult technical office

Maximum admissible rounds:

<90°C = 1600 rounds/min.
90÷200°C = 1400 rounds/min.
200÷350°C = 1200 rounds/min.

Noise level tolerance + 3 dBA



KW consumed fan tolerance ± 3%

OVERALL DIMENSIONS in mm

Fan with cooling fan

PD² = 1,63 kgm²
GD²

Weight kg 97

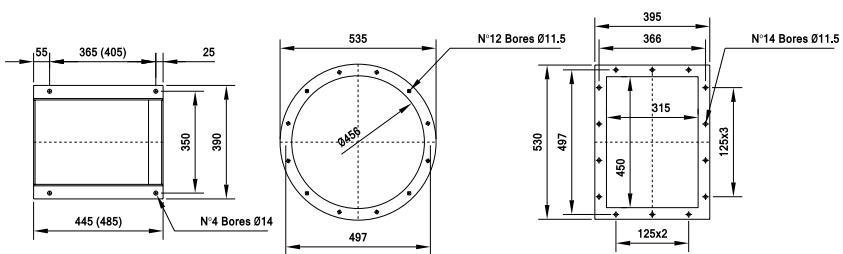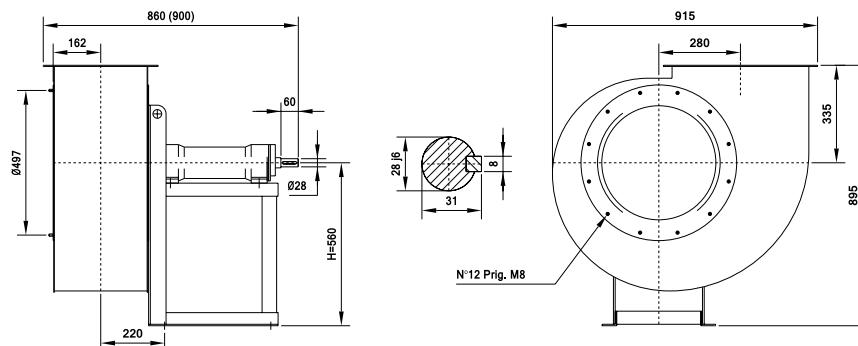


The fan is revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis's height	RD/								LG/							
	0	45	90	135	180	225	270	315	0	45	90	135	180	225	270	315
	H=560				H=335			H=560					H=560		H=335	H=560

LPb 501

SERIES SPECIFICATIONS

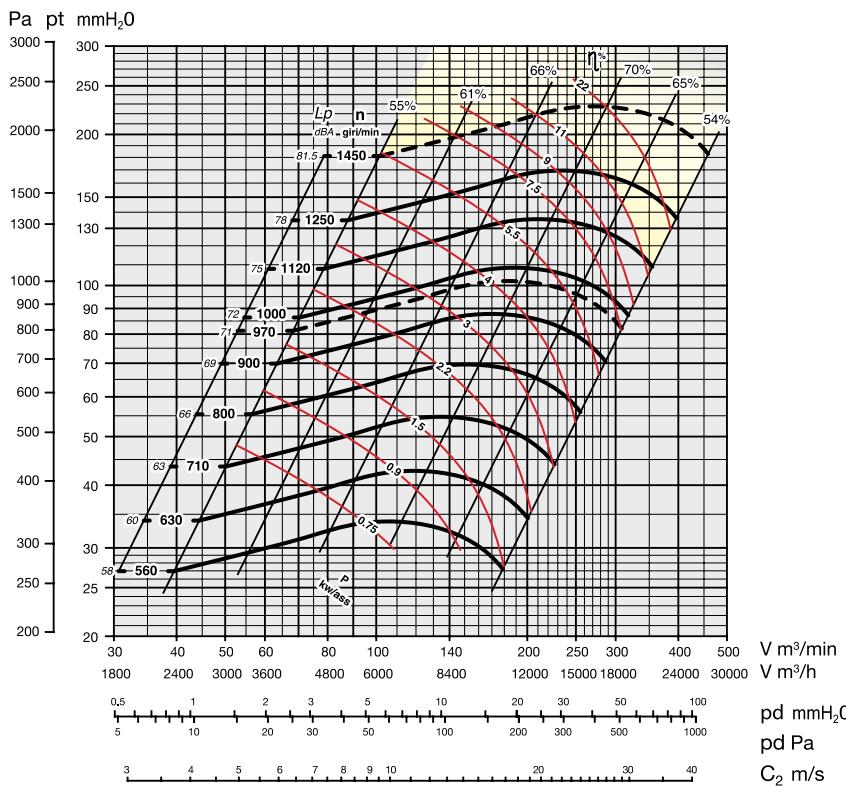

YELLOW ZONE - Consult technical office

Maximum admissible rounds:

<90°C = 1450 rounds/min.
90÷200°C = 1250 rounds/min.
200÷350°C = 1050 rounds/min.

Noise level tolerance + 3 dBA






KW consumed fan tolerance ± 3%

OVERALL DIMENSIONS in mm

Fan with cooling fan

 $PD^2 = 2,5 \text{ kgm}^2$
 $GD^2 = 2,5 \text{ kgm}^2$

Weight kg 115

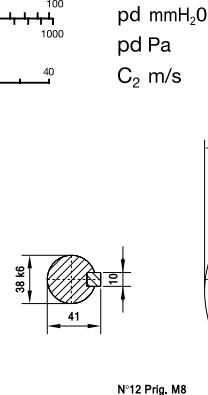

The fan is revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis height	RD/ Clockwise rotation							Axis height	LG/ Counter clockwise rotation							
	0	45	90	135	180	225	270	315	0	45	90	135	180	225	270	315
H=630									H=630							

LPb 561

SERIES SPECIFICATIONS

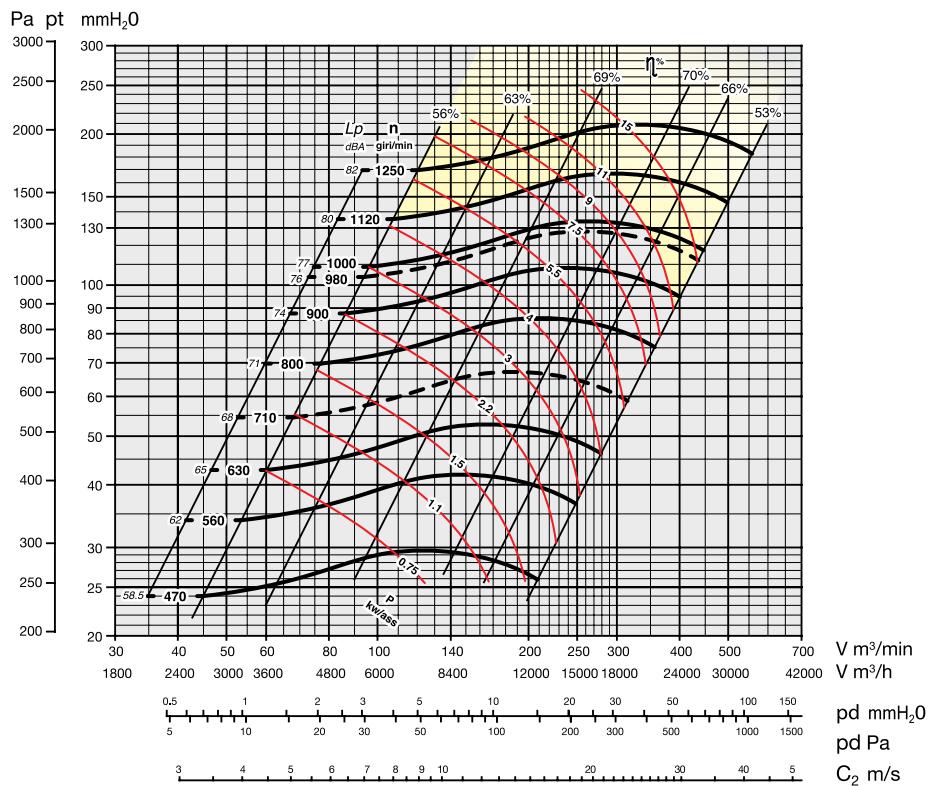

YELLOW ZONE - Consult technical office

Maximum admissible rounds:


<90°C = 1250 rounds/min.
90÷200°C = 1120 rounds/min.
200÷350°C = 950 rounds/min.

Noise level tolerance + 3 dBA

KW consumed fan tolerance ± 3%




OVERALL DIMENSIONS in mm

Fan with cooling fan

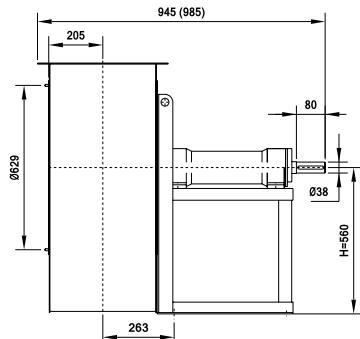

PD² = 4 kgm²
GD²

Weight kg 154

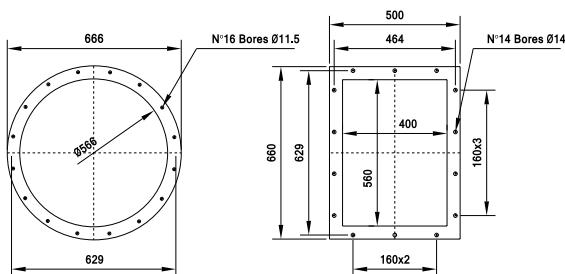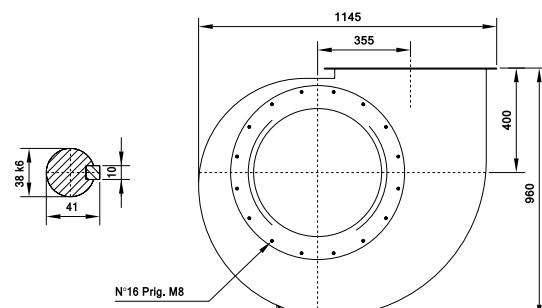


The fan is revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis height	RD/ Clockwise rotation							Axis height	LG/ Counter clockwise rotation								
	0	45	90	135	180	225	270	315	0	45	90	135	180	225	270	315	
H=560									H=560								
H=400																	
H=710																	

SERIES LPb 631 SPECIFICATIONS

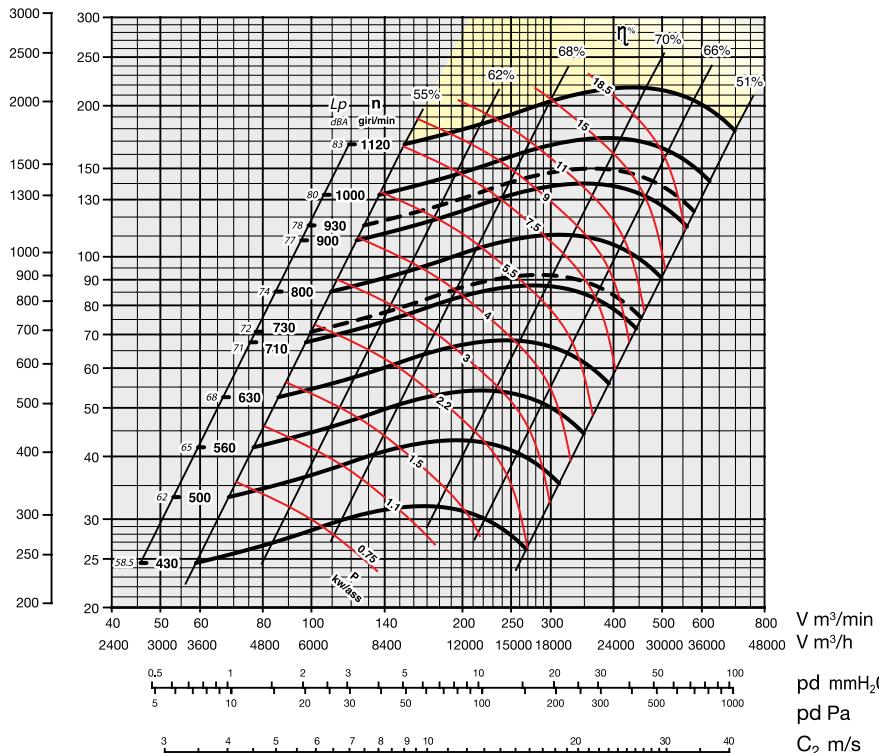 Pa pt mmH₂O


YELLOW ZONE - Consult technical office

Maximum admissible rounds:

 <90°C = 1120 rounds/min.
 90–200°C = 1000 rounds/min.
 200–350°C = 850 rounds/min.

Noise level tolerance + 3 dBA




KW consumed fan tolerance ± 3%

OVERALL DIMENSIONS in mm

Fan with cooling fan

 PD²
 GD² = 7,5 kgm²

Weight kg 200

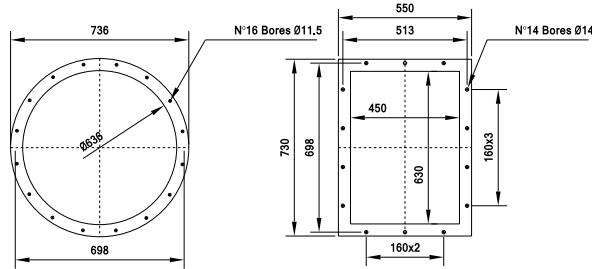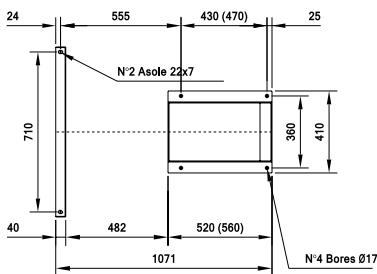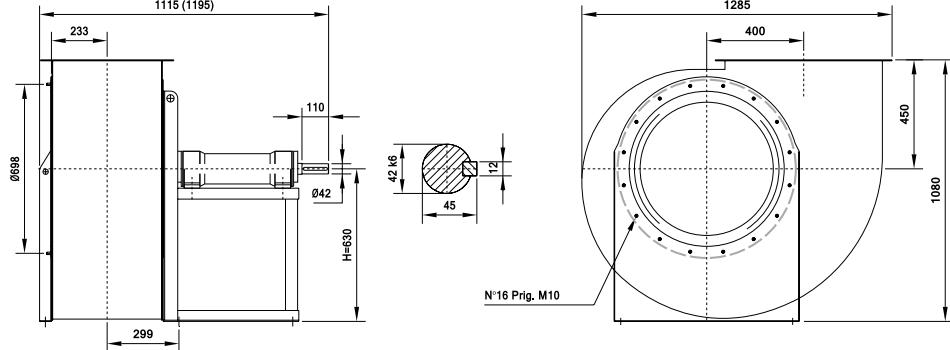

The fan is revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis's height	RD/ Clockwise rotation							LG/ Counter clockwise rotation								
	0	45	90	135	180	225	270	315	0	45	90	135	180	225	270	315
H=630									H=630							
H=450																
H=800																

SERIES LPb 711 SPECIFICATIONS

Pa pt mmH₂O

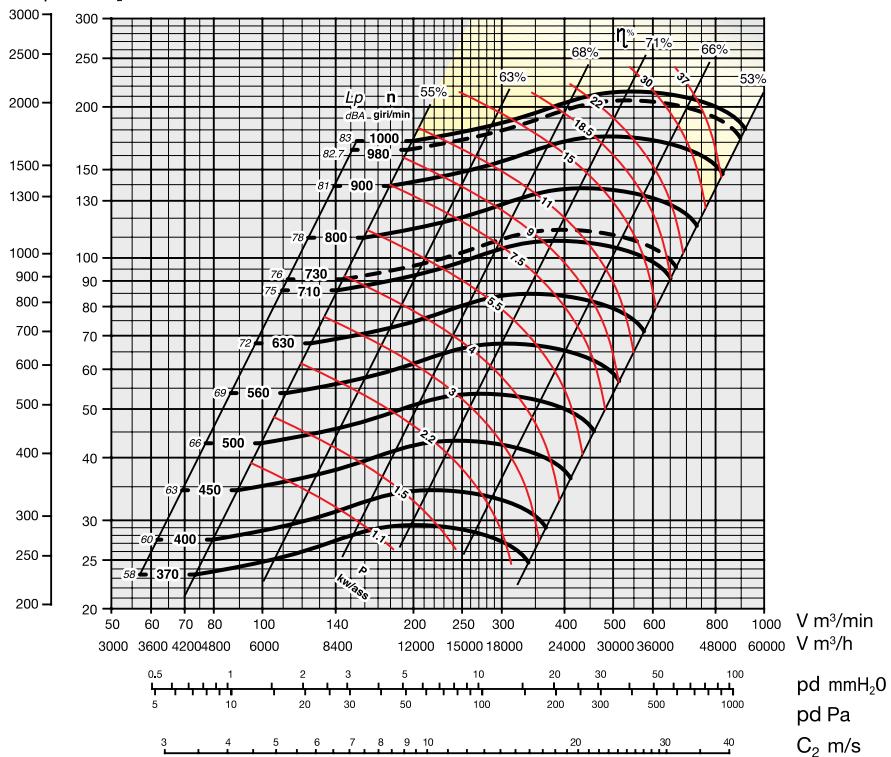

YELLOW ZONE - Consult technical office

Maximum admissible rounds:

<90°C = 1000 rounds/min.
90–200°C = 900 rounds/min.
200–350°C = 750 rounds/min.

Noise level tolerance + 3 dBA


KW consumed fan tolerance ± 3%

OVERALL DIMENSIONS in mm

Fan with cooling fan

PD² = 13,5 kgm²
GD² =

Weight kg 325

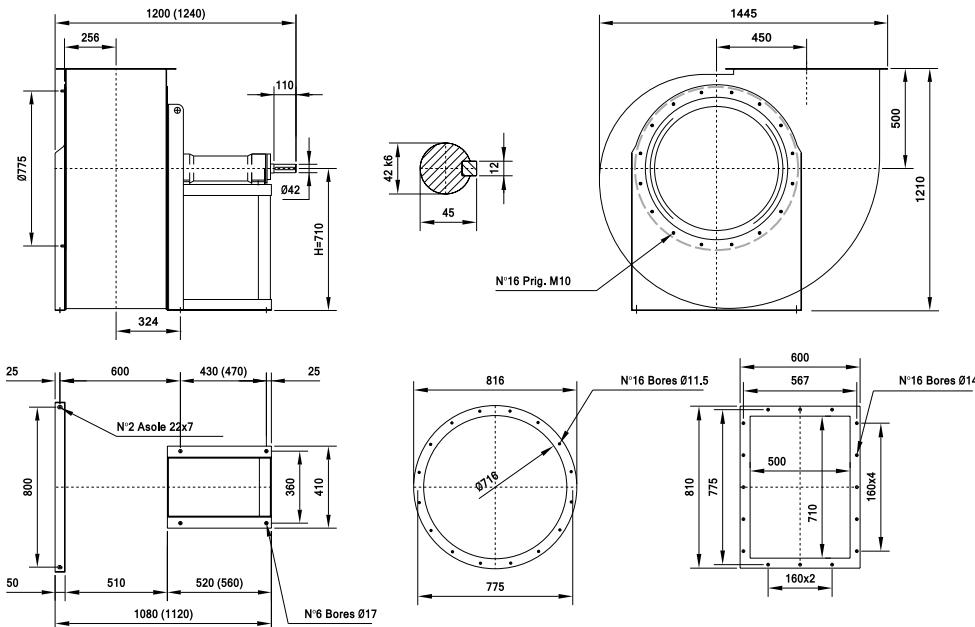


The fan is revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis height	RD/ Clockwise rotation								LG/ Counter clockwise rotation							
	0	45	90	135	180	225	270	315	0	45	90	135	180	225	270	315
									H=710				H=710			
													H=500			
													H=900			

LPb 801

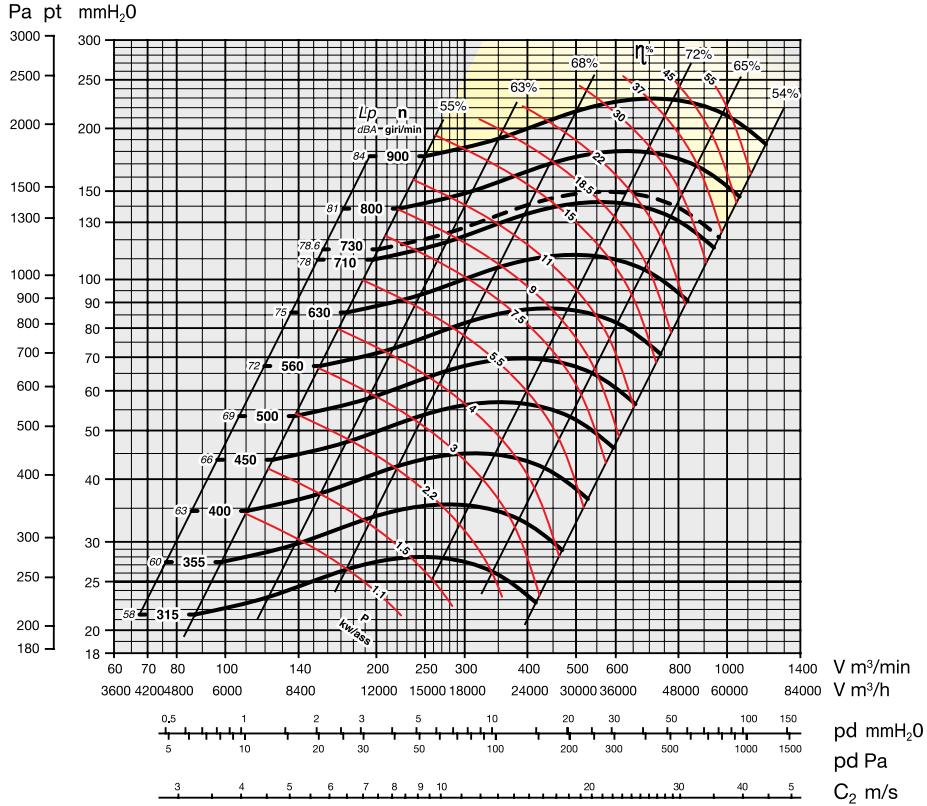

YELLOW ZONE - Consult technical office





Maximum admissible rounds:

<90°C = 900 rounds/min.
 90–200°C = 800 rounds/min.
 200–350°C = 630 rounds/min.

Noise level tolerance + 3 dBA

KW consumed fan tolerance $\pm 3\%$

OVERALL DIMENSIONS in mm

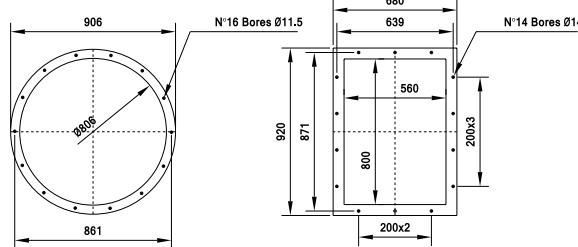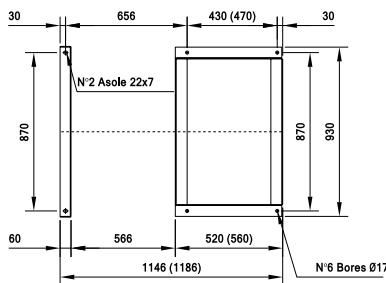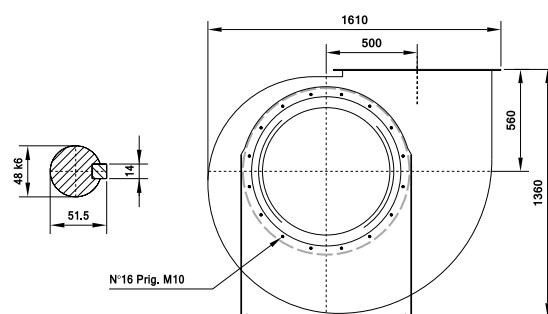


The fan is revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis's height	Clockwise rotation								Counter clockwise rotation							
	RD/	LG/	RD/	LG/	RD/	LG/	RD/	LG/	RD/	LG/	RD/	LG/	RD/	LG/	RD/	LG/
0																
H=800																

SERIES LPb 901

SPECIFICATIONS

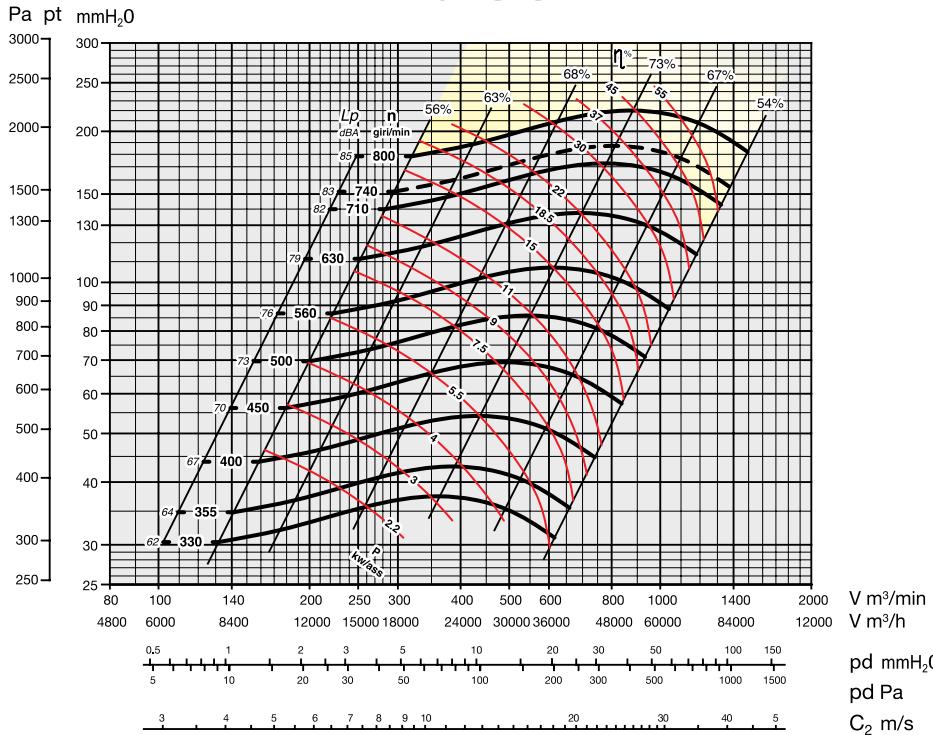

YELLOW ZONE - Consult technical office

Maximum admissible rounds:


<90°C = 800 rounds/min.
90–200°C = 710 rounds/min.
200–350°C = 560 rounds/min.

Noise level tolerance + 3 dBA

KW consumed fan tolerance $\pm 3\%$


OVERALL DIMENSIONS in mm

Fan with cooling fan

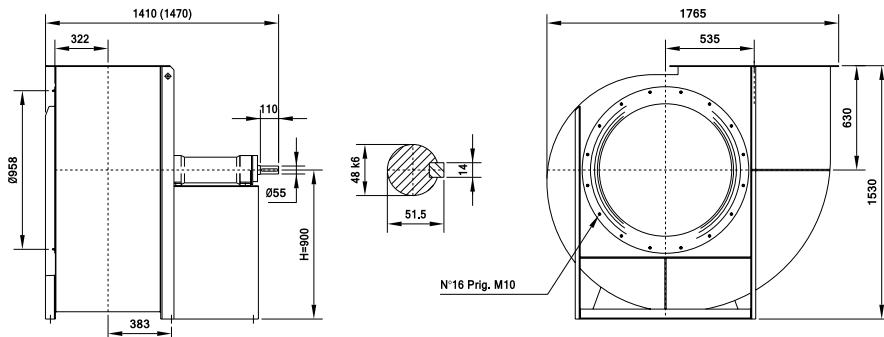

$PD^2 = 42 \text{ kgm}^2$

Weight kg 455

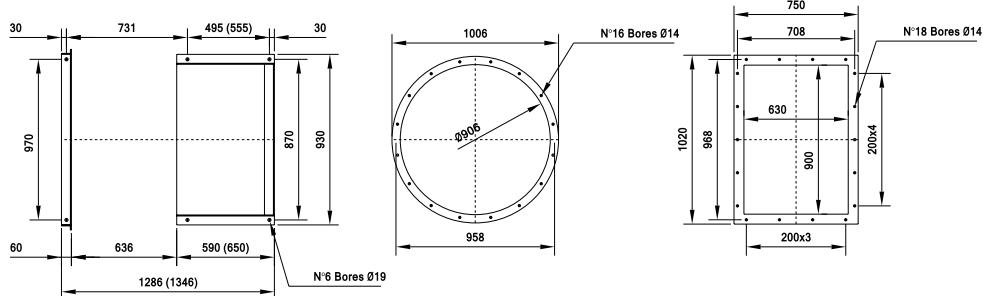


The fan is not revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis's height	RD/		Clockwise rotation						Axis's height	LG/		Counter clockwise rotation					
	0	45	90	135	180	225	270	315		0	45	90	135	180	225	270	315
	H=900				H=630			H=1060		H=900		H=630		H=1060			

SERIES LPb 1001

SPECIFICATIONS

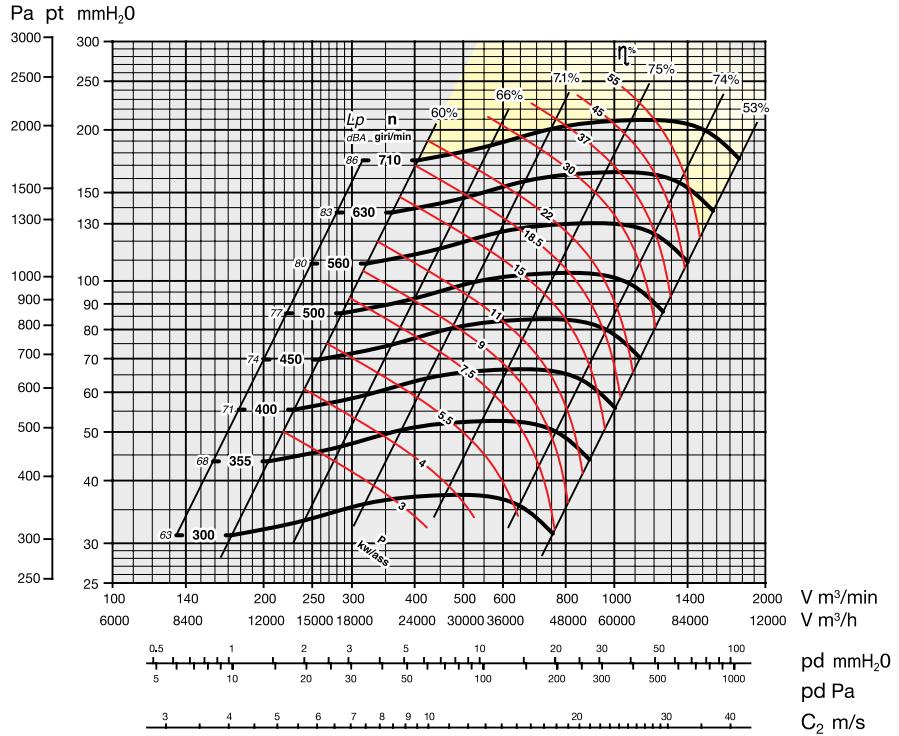

YELLOW ZONE - Consult technical office

Maximum admissible rounds:


<90°C	= 710 rounds/min.
90–200°C	= 630 rounds/min.
200–350°C	= 500 rounds/min.

Noise level tolerance + 3 dBA

KW consumed fan tolerance ± 3%

OVERALL DIMENSIONS in mm

Fan with cooling fan

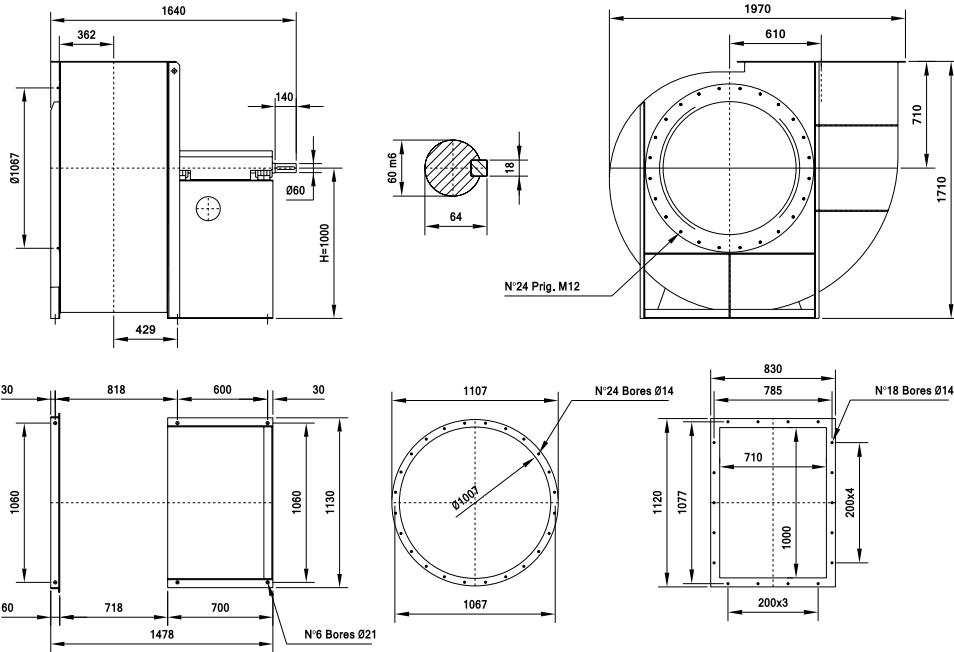

The fan is not revolvable

UNI ISO 13349 rules orientations (transmission side)

Axis's height	RD/ Clockwise rotation							Axis's height	LG/ Counter clockwise rotation								
	0	45	90	135	180	225	270	315	0	45	90	135	180	225	270	315	
									H=1000	H=710	H=1180	H=1000	H=710	H=1180	H=1000	H=710	H=1180



Bedplate (Esec. 12)

MOTOR TYPE	M 80-90-100 M 112-132	M 160-180 M 200-225	M 250-280 M 315
G	530	850	1120

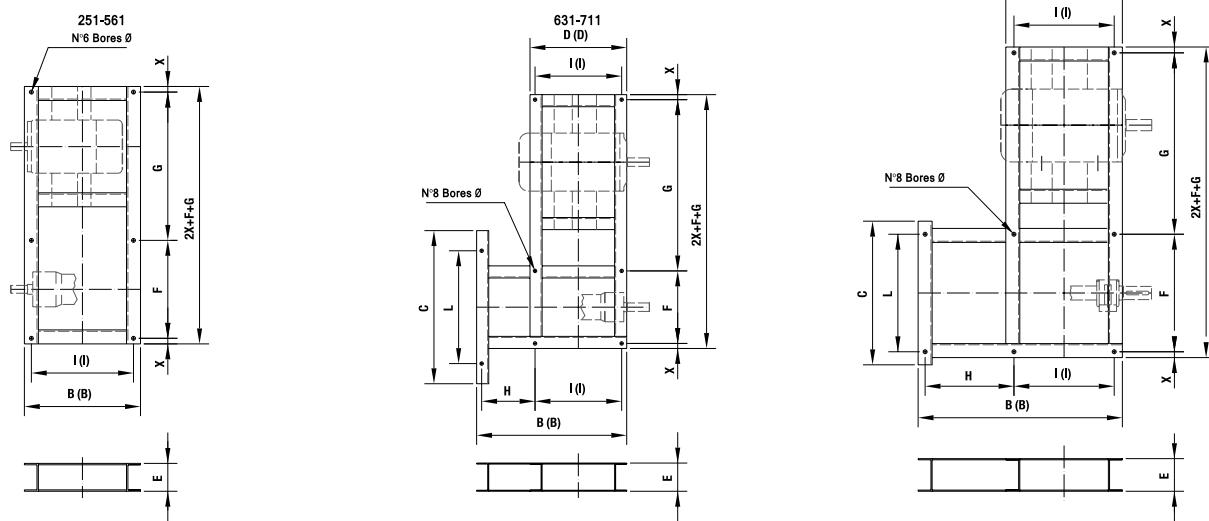


Dimensions

Series	Class	mm													Weight kg
		B	(B)	C	D	(D)	E	F	X	H	I	(l)	L	Ø	
LPb 251-281-311	-	320	320	-	-	-	100	280	20	-	270	270	-	14	12
LPb 351-401	-	415	455	-	-	-	100	350	20	-	365	405	-	14	18
LPb 451	-	415	455	-	-	-	100	350	20	-	365	405	-	14	18
LPb 501	-	415	455	-	-	-	100	350	20	-	365	405	-	14	18
LPb 561	-	425	465	-	-	-	100	350	20	-	375	415	-	17	18
LPb 631	-	1030	1070	820	480	520	100	360	25	555	430	470	710	17	35
LPb 711	-	1089	1129	920	500	540	125	360	25	600	430	470	800	17	45
LPb 801	-	1156	1196	990	490	530	150	870	30	661	430	470	870	17	76
LPb 901	-	1286	1346	1090	555	615	150	970	30	731	495	555	970	17	85
LPb 1001	-	1488	1488	1220	670	670	180	1060	40	818	600	600	1060	21	118

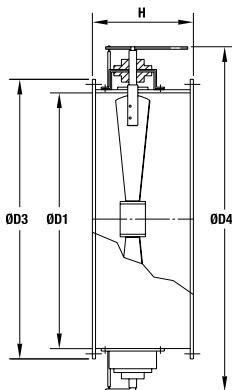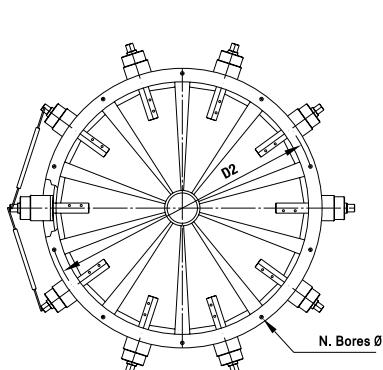Accessories
Circular flow regulators
OVERALL DIMENSIONS in mm


Type	D ₁	D ₂	D ₃	D ₄	H	n°	Bores Ø	Weight kg
280	280	332	366	450	280	8	11,5	24
315	315	366	400	495	280			19
355	355	405	440	535	280			21
400 *	400	448	485	580	315			23
450	450	497	535	630	315			26
500	500	551	585	680	355			50
560	560	629	666	740	355			60
630	630	698	736	810	355			66
710	710	775	816	890	355	16	16	71
800	800	861	906	980	400			80
900	900	958	1006	1080	400			96
1000	1000	1067	1107	1180	400			120
1120	1120	1200	1248	1300	450			150
1250	1250	1337	1380	1430	450			180
1400	1400	1491	1540	1580	450			250
1600	1600	1663	1730	1780	500			300
1800	1810	1880	1930	2200	500	24	18	280
2000	2010	2073	2130	2380	500			340

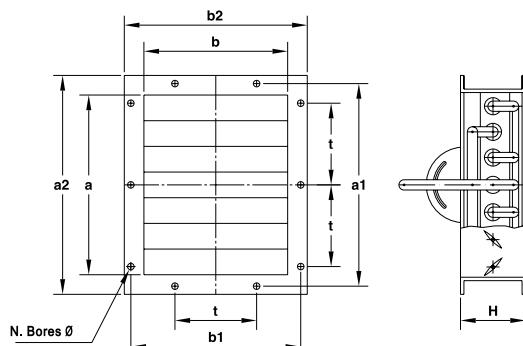Rectangular flow regulators, outflow end
OVERALL DIMENSIONS in mm


Type	a	b	a ₁	b ₁	a ₂	b ₂	H	t	n°	Bores Ø	Weight kg
90 x 63	90	63	112	90	150	123	130	-	4	9	2,2
100 x 71	100	71	125	100	160	131	130	-			2,5
112 x 80	112	80	140	112	172	140	130				2,7
125 x 90	125	90	165	130	185	150	130				3
140 x 100	140	100	182	141	210	170	130				3,3
160 x 112	160	112	200	153	230	182	130				3,8
180 x 125	180	125	219	167	250	195	130				4,5
200 x 140	200	140	241	182	270	210	130				5,3
224 x 160	224	160	265	200	294	230	130		6	11,5	6,5
250 x 180	250	180	292	219	320	250	130				7,5
280 x 200	280	200	332	249	360	280	130				8,5
315 x 224	315	224	366	273	395	304	130				9,6
355 x 250	355	250	405	300	435	330	130				11
400 x 280	400	280	448	332	484	368	130				13
450 x 315	450	315	497	366	533	402	130				18
500 x 355	500	355	551	405	587	441	150				21
560 x 400	560	400	629	464	669	504	150		14	18	26
630 x 450	630	450	698	513	738	553	180				30
710 x 500	710	500	775	567	815	607	180				34
800 x 560	800	560	871	639	921	689	200				42
900 x 630	900	630	968	708	1018	758	200				48
1000 x 710	1000	710	1077	785	1127	835	200				65
1120 x 800	1120	800	1210	881	1270	941	220				80
1250 x 900	1250	900	1347	978	1407	1038	220				95
1400 x 1000	1400	1000	1501	1147	1561	1087	250		24	22	110
1600 x 1120	1600	1120	1753	1290	1683	1280	250				150
1800 x 1250	1800	1250	1876	1357	1960	1410	280				200
2000 x 1400	2000	1400	2093	1511	2180	1580	280				280

External flow regulator designed for dusty air, sturdy construction, for industrial use.


Layout 1 = max. temperature 120°C.

Layout 2 = from 120 to 350°C. + pression ≥ 700 mm H_O.

Accessories

Louver flow regulators


OVERALL DIMENSIONS in mm

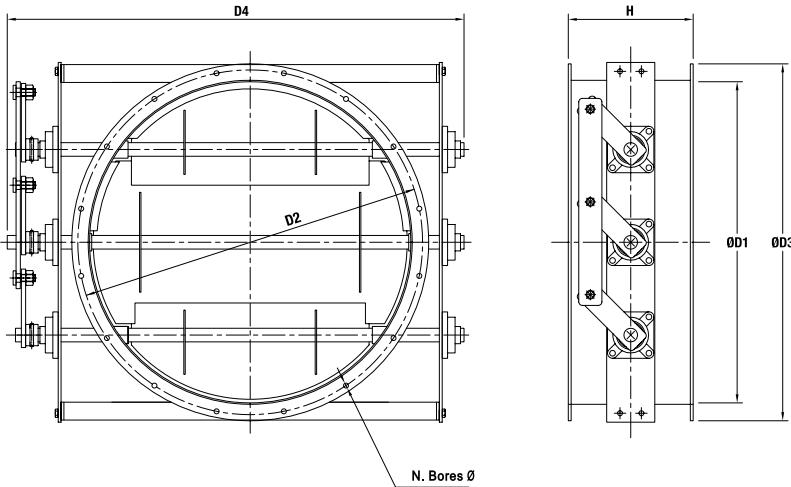

Type	D ₁	D ₂	D ₃	D ₄	H	Weight kg
315	315	366	400	640	280	21
355	355	405	440	680	280	23
400*	400	448	485	720	315	29
450	450	497	535	770	315	32
500	500	551	585	820	355	60
560	560	629	666	900	355	75
630	630	698	736	1040	355	80
710	710	775	816	1130	355	86
800	800	861	906	1220	400	93
900	900	958	1006	1320	400	110
1000	1000	1067	1107	1420	400	126
1120	1120	1200	1248	1560	450	160
1250	1250	1337	1380	1690	450	192
1400	1400	1491	1540	1860	450	260
1600	1600	1663	1730	2050	500	320

Butterfly flow regulators


OVERALL DIMENSIONS in mm

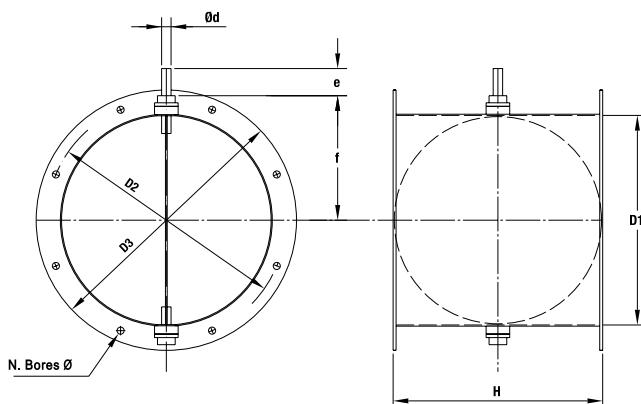

Type	D ₁	D ₂	D ₃	d	e	f	H	n'...Bores Ø	Weight kg
140	140	182	215	14	30	110	140	8 - 11,5	2,8
160	160	200	235	14	30	120	160	8 - 11,5	3,2
180	180	219	255	14	30	130	180	8 - 11,5	4
200	200	241	275	16	30	140	200	8 - 11,5	4,8
224	224	265	299	16	30	150	224	8 - 11,5	5,5
250	250	292	325	16	45	165	250	8 - 11,5	6,5
280	280	332	366	16	45	180	280	8 - 11,5	8,5
315	315	366	401	16	45	195	315	8 - 11,5	10,5
355	355	405	441	16	45	215	355	8 - 11,5	13,5
400*	400	448	486	16	45	240	400	12 - 11,5	18
450	450	497	535	20	60	280	450	12 - 11,5	23
500	500	551	585	20	60	305	500	12 - 11,5	29
560	560	629	666	20	60	335	560	16 - 11,5	36
630	630	698	736	20	60	370	630	16 - 13	47
710	710	775	816	20	60	410	710	16 - 13	61
800	800	861	906	30	70	455	800	16 - 13	80
900	900	958	1006	30	70	505	900	16 - 13	100
1000	1000	1067	1107	30	70	555	1000	24 - 14	155
1120	1120	1200	1248	30	70	615	1120	24 - 14	190


Accessories

Vibration-damping couplings outflow-end

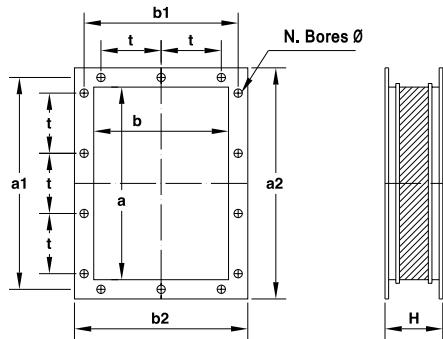

Series	mm								Bores		Weight kg
	a	b	a_1	b_1	a_2	b_2	t	H	n°	\varnothing	
90 x 63	90	63	112	90	150	123	-	140	4	11	1
100 x 71	100	71	125	100	160	131	-	140	4	11	1,1
112 x 80	112	80	140	112	172	140	-	140	4	11	1,3
125 x 90	125	90	165	130	185	150	100	140	6	11	1,6
140 x 100	140	100	182	141	210	170	112	140	6	12	2,1
160 x 112	160	112	200	153	230	182	112	140	6	12	2,6
180 x 125	180	125	219	167	250	195	112	140	6	12	3,2
200 x 140	200	140	241	182	270	210	112	140	8	12	3,9
224 x 160	224	160	265	200	294	230	112	140	8	12	4,6
250 x 180	250	180	292	219	320	250	112	140	10	12	5,5
280 x 200	280	200	332	249	360	280	125	140	10	12	7
315 x 224	315	224	366	273	395	304	125	140	10	12	8,2
355 x 250	355	250	405	300	435	330	125	140	10	12	10
400 x 280	400	280	448	332	480	360	125	140	14	11,5	11,2
450 x 315	450	315	497	366	530	395	125	140	14	11,5	13
500 x 355	500	355	551	405	580	435	125	160	14	11,5	14,5
560 x 400	560	400	629	464	660	500	160	160	14	14	18
630 x 450	630	450	698	513	730	550	160	160	14	14	19,5
710 x 500	710	500	775	567	810	600	160	160	16	14	22
800 x 560	800	560	871	639	920	680	200	160	14	14	31
900 x 630	900	630	968	708	1020	750	200	160	18	14	37
1000 x 710	1000	710	1077	785	1120	830	200	200	18	14	45
1120 x 800	1120	800	1210	881	1260	940	200	200	20	18	56
1250 x 900	1250	900	1347	978	1390	1040	200	200	24	18	65
1400 x 1000	1400	1000	1501	1087	1560	1160	200	200	24	18	80
1600 x 1120	1600	1120	1683	1220	1760	1280	200	200	28	22	100
1800 x 1250	1800	1250	1876	1357	1960	1410	200	200	32	22	130
2000 x 1400	2000	1400	2093	1511	2180	1580	200	200	34	22	165


Vibration-damping couplings intake-end

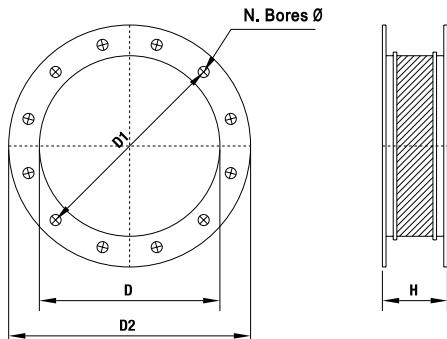

Series	mm				Bores		Weight kg
	D	D_1	D_2	H	n°	\varnothing	
140	140	182	215	140	8	11,5	3
160	160	200	235	140	8	11,5	3,2
180	180	219	255	140	8	11,5	3,5
200	200	241	275	140	8	11,5	3,8
224	224	265	299	140	8	11,5	4,2
250	250	292	325	140	8	11,5	5
280	280	332	366	140	8	11,5	6,8
315	315	366	401	140	8	11,5	7,5
355	355	405	440	140	8	11,5	9
400	400	448	485	140	12	11,5	10
450	450	497	535	140	12	11,5	11,5
500	500	551	585	160	12	11,5	13
560	560	629	666	160	16	11,5	16
630	630	698	736	160	16	13	17,5
710	710	775	816	160	16	13	20
800	800	861	906	160	16	13	22
900	900	958	1006	160	16	13	25
1000	1000	1067	1107	200	24	14	28
1120	1120	1200	1248	200	24	14	42
1250	1250	1337	1380	200	24	14	46
1400	1400	1491	1540	200	24	16	52
1600	1600	1663	1730	200	24	16	62
1800	1810	1880	1950	200	32	18	85
2000	2010	2073	2130	200	32	18	110


Accessories

Protection Net

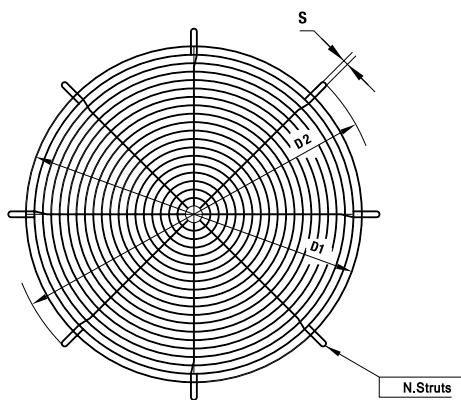


Dn	D ₁ (mm)	D ₂ (mm)	S (mm)	N° Struts
125				
140	140	220	12	4
160				
180				
200	212	285	12	4
224				
250				
280	312	385	12	4
315				
355	357	430	12	4
400	408	470	12	4
450	450	528	12	4
500	500	580	16	4
560	562	650	16	4
630	620	720	16	8
710	710	800	16	8
800	795	895	16	8
900	890	990	16	8
1000	990	1130	18	8
1120	1115	1250	18	8
1250	1245	1400	20	8
1400	1405	1560	20	8
1600	1595	1750	20	8
1800	1795	1950	20	8
2000	1995	2150	20	8

ISOLATOR



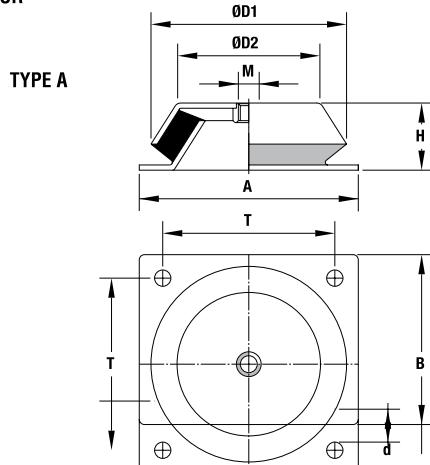


Type	A	B	H	M	T	d	D1	D2
MOD 58540	108	108	40	12	88	9	101	75
MOD 33629	168	168	50	16	132	13	136	125
MOD 58541	200	200	70	20	165	13	192	170

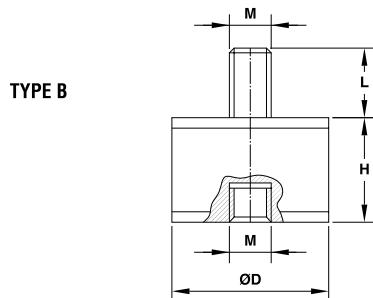

Type	D	H	M	L
B_D3020	30	20	8	20
B_D3030	30	30	8	20
B_D4030	40	30	8	23
B_D4040	40	40	8	23
B_D5020	50	20	10	28
B_D5030	50	30	10	28
B_D5045	50	45	10	28
B_D7045	70	45	10	30
B_D7540	75	40	12	37
B_D7555	75	55	12	37
B_D10040	100	40	16	45
B_D10055	100	55	16	45
B_D10075	100	75	16	45


(Quote = mm)

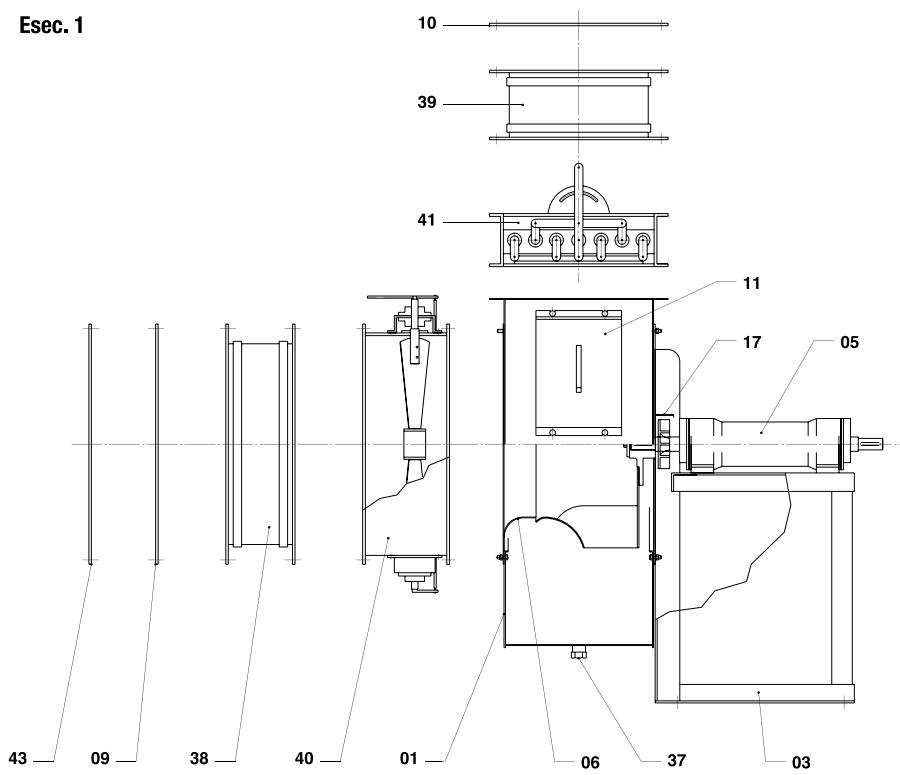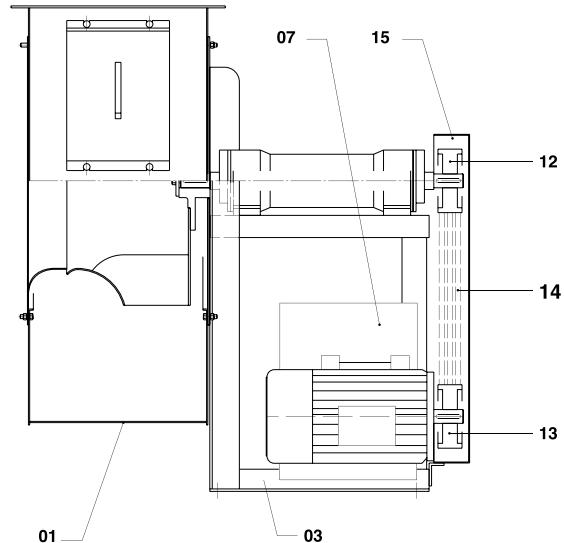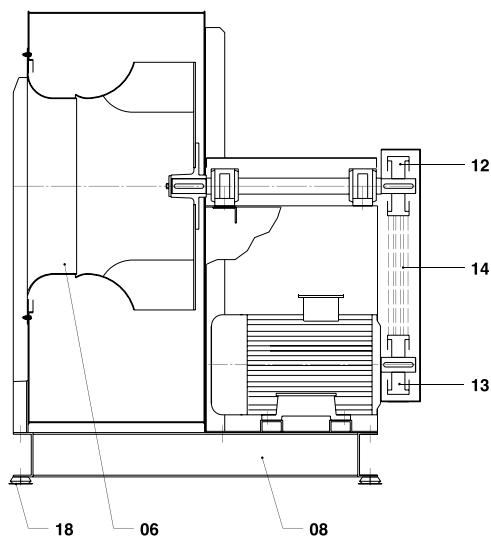SECTION
Esec. 1

Esec. 9

Esec. 12


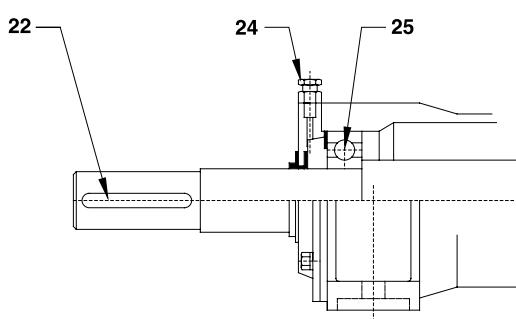
SECTION

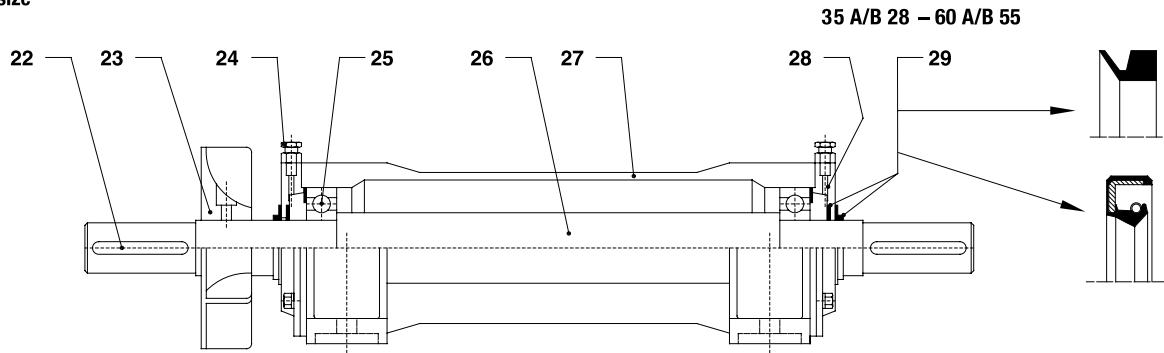Support monobloc


Frame size



35 AL 28 - 60 AL 55




**50 A/B R 48 - 60 A/B 55
50 AL R 48 - 60 AL R 55**

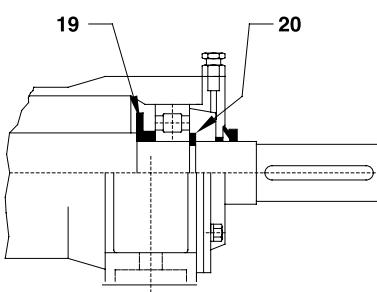

Frame size

SNL 515 ÷ SNL 524

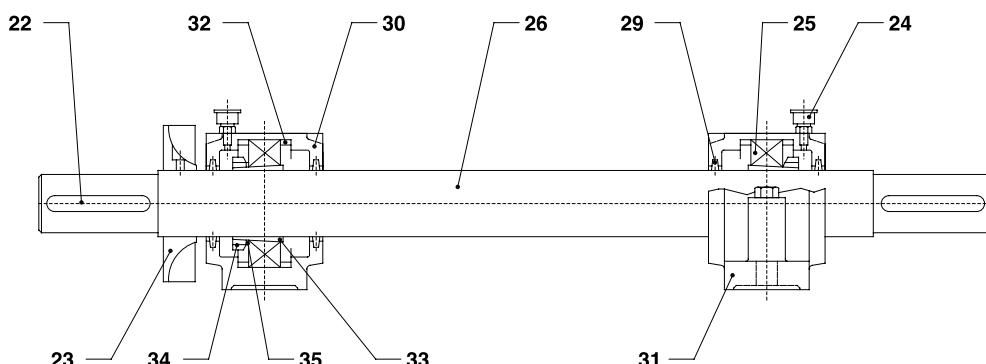

SPARE PARTS

01 - CASE	15 - BELT PROTECTION CASE	31 - HOUSING
02 - IMPELLER	17 - COOLING FAN PROTECTION	32 - FIXING COLLARS
03 - BASE	18 - SHOCK ISOLATING MOUNTINGS	33 - LOCKING COMPASS
04 - MOTOR	19 - SEALING RING	34 - RING NUT
05 - SUPPORT	20 - SEEGER RING	35 - SECURITY WASHER
06 - NOZZLE	22 - KEY	37 - DISCHARGE CAP
07 - TURNING BASE	23 - COOLING FAN	38 - SUCKING FLEXIBLE JOINT
08 - BEDPLATE	24 - LUBRIFICATOR	39 - PRESSING FLEXIBLE JOINT
09 - SUCKING COUNTERFLANGE	25 - BEARING	40 - CIRCULAR FLOW REGULATOR
10 - PRESSING COUNTERFLANGE	26 - SHAFT	41 - RECTANGULAR FLOW REGULATOR
11 - INSPECTION DOOR	27 - CASE	43 - PROTECTION NET
12 - FAN PULLEY	28 - CAP	
13 - MOTOR PULLEY	29 - PROTECTION RING	
14 - FAN BELTS	30 - COVER	

Inquiry for Eurovent Blower

Subject : _____ Data : _____
 From : _____
 Company _____ Job No.: _____
 Contact _____
 Tel : _____
 Fax : _____ E-mail : _____

Fan Specification

Technical Data Information		
Model	m^3/min	
Air volume	mm Wg	
Staic pressure	mm Wg	
Total pressure	$^{\circ}\text{C}$	
Service Temperature	rpm	
Fan speed	KW	
Motor	%	
Efficiency		
Colour (Standard Green)		
Qty .	Set	
Construction		
Type	<input type="checkbox"/> Centrifugal <input type="checkbox"/> Axial <input type="checkbox"/> Propeller <input type="checkbox"/> recommended by vendor	
Power Transmission	<input type="checkbox"/> Direct <input type="checkbox"/> Belt <input type="checkbox"/> recommended by vendor	
Position (see table 1)		
Accessory	<input type="checkbox"/> Inlet Damper <input type="checkbox"/> Outlet Damper <input type="checkbox"/> Filter <input type="checkbox"/> Expansion joint	
	<input type="checkbox"/> Inspection Hole <input type="checkbox"/> Drain with plug	
Application		
If replace for old blower please give original information.		

**** Do not use direct drive for hot air fan**

This information above is for guideline only , fan supplier should re-check and select the proper solutions.

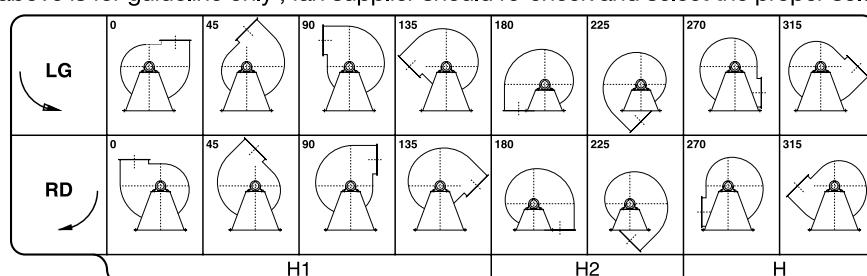


Table 1 Show position

Please send to

E-mail : info@euroventblower.com

Checked by	Approve by

Note :



EUROVENT CO.,LTD

18/5 Moo 13 Soi Watmainongpa-ong Petchkasem Rd.
Omnoi Krathumban Samutsakorn 74130 Thailand.
Tel : +66(2) 813 8118 +66(2) 115 5000
Fax : +66(2) 811 0808 +66(2) 115 5555
E-mail : info@euroventblower.com
www.euroventblower.com www.tngroup.co.th